

UM384

Bench

Arq

By Jornet Llop © ® BENITO

Regulations and certifications:


ISO 9001 ISO 50001 ISO 14001 ISO 45001

ARQ 2000 designer Bench , total dimensions (length x height x depth) 2020x845x800 mm, made with a tropical wood section finished with fungicidal, insecticidal and water-repellent protection and a cold-rolled steel structure with an epoxy primer and oven-sublimated polyester paint, black oxiron forge color. Prepared for anchoring with M10 expansion bolts according to surface and project.

Materials & Finishes:

Ductile Iron treated with FERRUS: iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint.Forged black colour

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

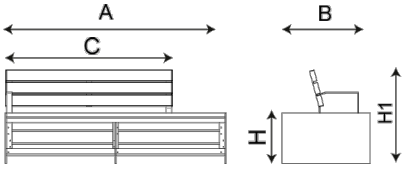

REF.	A	B	C	H	H1
UM384	2020	800	1220	455	845
UM384B	2020	800	--	455	--

Arq B
UM384B



V. 2026-07-23 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

BENITO

info@benito.com
tel. 93 852 1000

Bench **Arq** UM384

Downloads: *Project sheet* | *CAD* | *Mounting instructions* |





V. 2026-07-23 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.