

UM367B

Sidewalk

NEOBARCINO 700

Controled logging

Graffiti protector

Inclusive Product

Regulations and certifications:


ISO 9001 ISO 50001 ISO 14001 ISO 45001

0.7m bench made of tropical wood and painted steel
Bench 0.7m long. Steel structure with FERRUS hammered grey treatment. Seat formed by 4 slats of equal rectangular section 100x30mm, of solid tropical wood, FSC certified 100% protected with LIGNUS and GRAFUS treatment (anti-graffiti treatment for wooden surfaces). Fixing to the floor by means of four Ø10mm bolts.

Materials & Finishes:

Steel with FERRUS treatment: an iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, and it involves an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint.

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

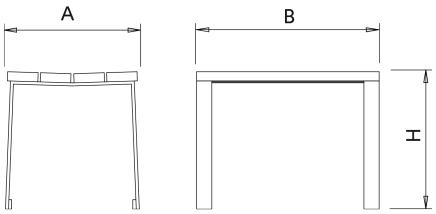

Ref.	A	B	H
UM367B	426	700	450

BENITO

info@benito.com
tel. 93 852 1000

V. 2026-07-24 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

Sidewalk
NEOBARCINO 700

UM367B

NeoBarcino
UM304N



Neobarcino
UM367T



NeoBarcino
UM304NS



Neobarcino 1800
UM367M



Downloads: *Project sheet* | *CAD* |

V. 2026-07-24 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.